

## Solution for a sustainable future? **thermoflow** !

Combi boiler DTB/STB series are the latest flagship products by **thermoflow**, and just like all other products introduced previously, **thermoflow** aims to explore and refine the usage of electrical power in order to create a more sustainable future for our younger generations.



**MULTIFUNCTIONAL**



**CARBON NEUTRAL**




**CONVENIENT**



**INTELLIGENT**



Model	STB 6/9/12			DTB 12/15/18/21/24				
Voltage	230 V / 400 V			400 V				
Power	6 kW	9 kW	12 kW	12 kW	15 kW	18 kW	21 kW	24 kW
Current (A)	26 / 9	39 / 13	17	17	22	26	30	35
Cable Size (mm <sup>2</sup> )	4 / 3*1.5	6 / 3*2.5	3*2.5	3*2.5	3*2.5	3*4	3*6	3*6
Circuit Breaker (A)	32 / 16	50 / 16	25	25	25	32	40	40
Heating Area (m <sup>2</sup> )	60	90	120	120	150	180	210	240
MAX. Water Temperature	80 °C							
Working Temperature	radiator mode 30-80 °C (default 65 °C)							
	floor heating mode 30-60 °C (default 50 °C)							
Anti-freeze Start Temperature	domestic hot water 35-70 °C (default 50 °C)			domestic hot water 35-60 °C (default 42 °C)				
Output Voltage of Pump	<7 °C							
Capacity of Expansion Tank	230 V, 0.5 A							
Inlet & Outlet Connection	G3/4"			6 L				
Net Weight	20kg			23kg				
Product Size	660 x 402 x 250mm			710 x 452 x 250mm				

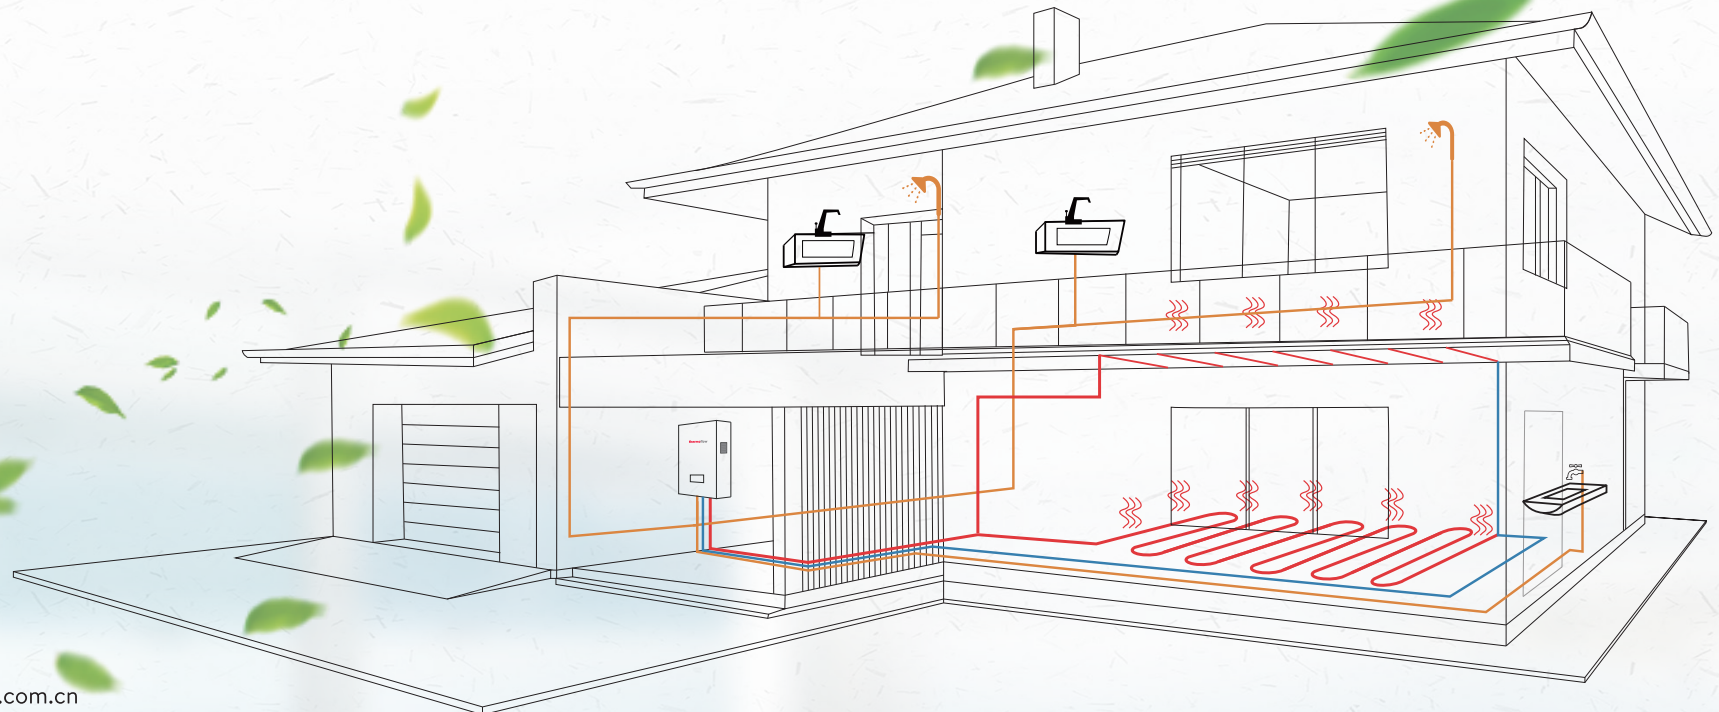

Phone: +86(25) 8453 1353

E-mail: thermoflow@sumec.com.cn